

A decorative graphic consisting of several white, curved, overlapping lines that resemble a stylized motor or a fan, positioned on the left side of the page.

# Motor Test Bench

Integrated testing and measurement platform for  
embedded systems

A decorative graphic consisting of several white, curved, overlapping lines that resemble a stylized motor or a fan, positioned on the left side of the page.

# Motor Test Bench - MTB

Manual and automated testing of motors and electronics.

With our Motor Test Bench, it is possible to perform manual or automated tests on complete mechatronic systems, as well as testing various environmental influences (e.g., fluctuations in supply voltage or simulated communication errors). The MTB offers enough space and capacity to operate several load sections, thus several load motors.



Width: 1245 mm  
Length: 2040 mm  
Height: 1775 mm

## One MTB for various use cases:

### Separated or integrated DUT (motor and electronics) measurement



Deviating from the normal testing of motor and electronics separately. It is permissible to use an integrated DUT consisting of motor and electronics. This is then located completely in the mechanical test chamber.

### Simultaneous measurement and recording of various variables



The MTB offers coverage for testing and measuring the functions and parameters of embedded systems. Analyzing mechanical and electrical characteristics, or evaluating mechatronic components during the development. It is a versatile tool that can be used to perform these tasks effectively.

### Design constructed for reliable results



Its modular design allows for different performance classes, providing precise and reliable results across diverse applications.

## Technical parameters

- Maximum continuous output power of 3.6 kW and maximum peak power of 4 kW
- High precision torque measurement with encoder resolution of 24 Bit
- Ingress Protection (IP) code of IP54 for electrical connections related to safety modes
- Wide range of voltage supplies including 230 VAC and 440 VDC


## Key applications

- Motor control real time data tracing
- Multiple mechanical and electrical DUT support
- Timing measurement and state change monitoring

## Key features

- Time-synchronized recording of various data via EtherCAT
- 4 parallel load motors with different ranges for different DUTs (from 100 W and 0.5 Nm up to 3 kW and 10Nm)
- 2 parallel electrical segments
- Software integration (ECU-TEST) into existing ecosystems and into application lifecycle management
- High precision power measurement with calibrated devices

## MTB Setup

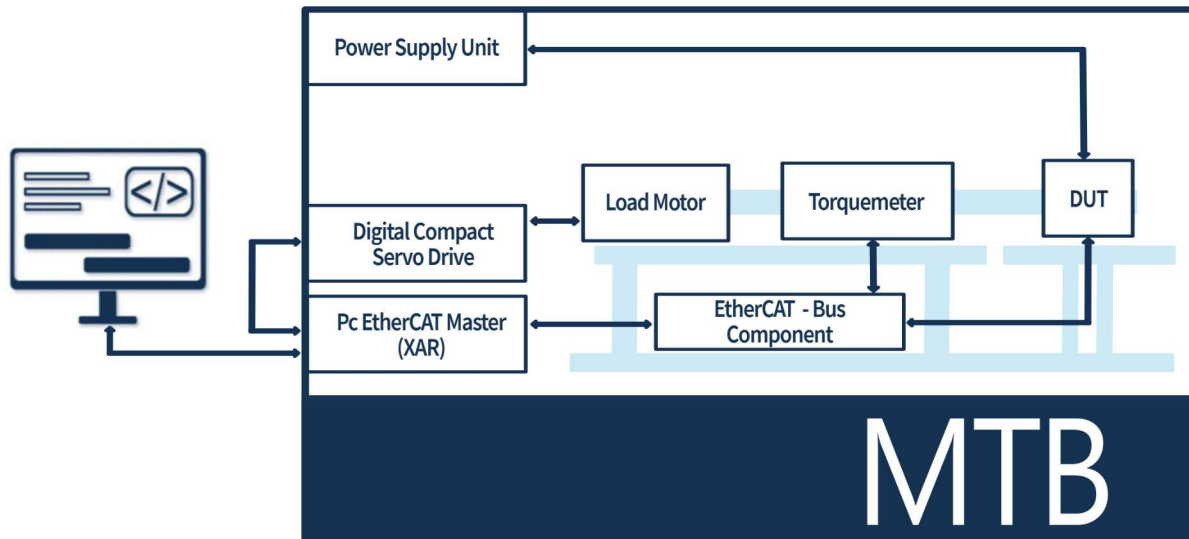

**Edition** 1.00

### Published by

MOTEON GmbH  
98693, Ilmenau

**@ 2023 MOTEON GmbH  
All Rights Reserved.**

Do you have questions about  
this document?

info@moteon.com

### Important notice

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this

document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.